


DIN-96DI-01

96-CH Isolated DI Termination Board with DIN-Rail Mounting

Features

- 96-CH isolated digital inputs
- For use with PCI-7396
- Isolated input voltage up to 24 V
- 2500 V_{RMS} optical isolation
- Screw terminals for easy field wiring

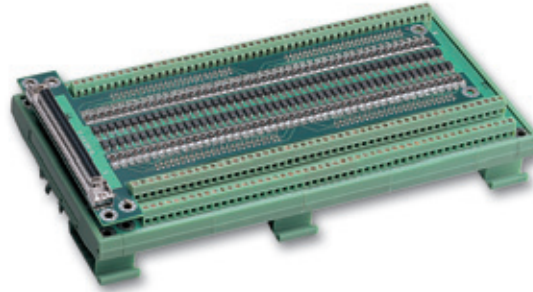

Specifications

- Number of channels: 96
- Maximum input range: 24 V
- Digital logic levels
 - 0-24 V, non-polarity
 - Input high voltage: 10-24 V
 - Input low voltage: 0-2 V
- Input Resistance: 4.7 kΩ @ 0.5 W
- Isolation voltage: 2500 V_{RMS}
- I/O connector: 100-pin SCSI-II female

- Operating temperature: 0 to 60 °C
- Storage temperature: -20 to 80 °C
- Relative humidity: 5 to 95%, non-condensing
- Power consumption

+5 V
48 mA maximum

- Dimensions: 226 mm x 121 mm x 48 mm (WxLxH)

Ordering Information

- **DIN-96DI-01⁽¹⁾**
96-CH Isolated DI Termination Board with DIN-Rail Mounting
- **Accessory**
 - **Mating Cable⁽²⁾**
ACL-102100-1: 100-Pin SCSI-II Cable, 1 M

Note:


- (1) Cables are not included
- (2) For various length options, please contact local agents.

DIN-96DO-01

96-CH Isolated DO Termination Board with DIN-Rail Mounting

Features

- 96-CH isolated digital outputs
- For use with PCI-7396
- Sink current up to 500 mA on each isolated output
- 2500 V_{RMS} optical isolation
- Screw terminals for easy field wiring

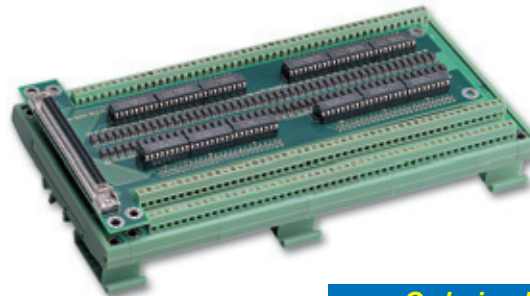

Specifications

- Number of channels: 96
- Output type: open collector Darlington transistor
- Sink current
 - Max. 500 mA for only one Darlington pair
 - 500 mA for all Darlington pair @ 20% duty
- Power dissipation: Max. 2.25 W per chip (8 DO channels)
- Supply voltage: 5-35 V_{dc}
- Isolation voltage: 2500 V_{RMS}

- I/O Connector: 100-pin SCSI-II female
- Operating temperature: 0 to 60 °C
- Storage temperature: -20 to 80 °C
- Relative humidity: 5 to 95%, non-condensing
- Power consumption

+5 V
102 mA maximum

- Dimensions: 226 mm x 121 mm x 48 mm (WxLxH)

Ordering Information

- **DIN-96DO-01⁽¹⁾**
96-CH Isolated DO Termination Board with DIN-Rail Mounting
- **Accessory**
 - **Mating Cable⁽²⁾**
ACL-102100-1: 100-Pin SCSI-II Cable, 1 M

Note:

- (1) Cables are not included
- (2) For various length options, please contact local agents.