

RK-606UC

6-slot Desktop/Wallmount Chassis for Full-Size SBC



Features

- Support 6-slot ISA or ISA/PCI™ backplane
- Equipped with one 5.25" and one 3.5" front access drive bays
- Flexible hold down bar for cards
- Replaceable and easy to clean filter

Ordering Information

Model Name	Color	Backplane	Power supply
NS-606UC-6S4-300	Black	HPCI-6S4	APS-9130XU

Backplane Options

Model Name	PICMG® CPU	PCI™	ISA	PSU Connector
HPCI-6S4	1	4	1	ATX/AT

Power Supply Options

Model Number	Watt	Input Range	Output (Max.)					Current Type	
			+5.0 V	+3.3 V	+12 V	-12 V	-5 V		+5 Vsb
APS-9130XU	300 W	90-264AC full Range	24 A	20 A	20 A	0.5 A	0.5 A	1.5 A	ATX12


Note: Mini Redundant power supply units are not supported

Specifications

Dimensions	7.5 x 9.7 x 16.2 inch (190.5 x 246.4 x 411.5 mm) (W x H x D)
Drive Bays	One 5.25" and one 3.5" front accessible drive bay Two internal 3.5" drive bays
Construction	Heavy-Duty cold-rolled Steel
Color	Option Black: standard Others: call for availability
Cooling Fans	One 8 cm in-take Fan, 49 CFM
Front Panel	LEDs: HDD active and system power System reset switch, ATX Power switch, optional AT power on/off switch Two USB connectors
Rear Panel	Supports 6-slot passive backplane
Carton Size	22 x 13.2 x 16.2 inch (561 x 336 x 412 mm)
Weight	7 kgs/15.4 lbs

Dimensions

Units: mm

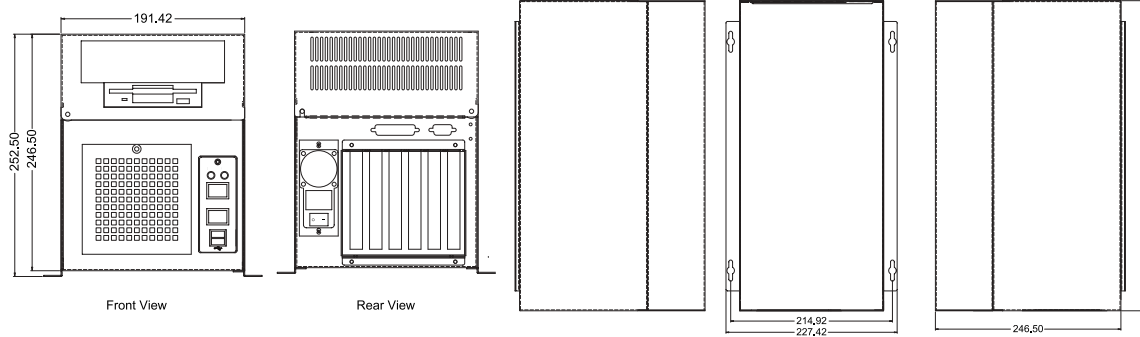

- 1 AdvancedTCA Products
- 2 6U cPCI SBC
- 3 6U cPCI Platforms
- 4 3U cPCI SBC
- 5 3U cPCI Platforms
- 6 SBC & IMB
- 7 Industrial Chassis
- 8 Computer On Modules
- 9 Network Security Appliances
- 10 Panel PC
- 11 IPC Accessories