

RK-410S

4U Rackmount Industrial Chassis with 14-slot Backplane



Industrial Chassis



Features

- EIA RS-310C 19" Rackmount Standard
- 17.8 inches (451mm) short depth
- Three 5.25 and one 3.5 inch shock-resistant drive bays
- Flexible hold down bar for cards
- Supports varieties of backplane and power supply units

Ordering Information

Model Name	Color	Backplane	Power Supply
NS-410SW-14S12U-30	Beige	HPCI-14S12U	APS-930XA-ST

Backplane Options

Model Name	PICMG CPU	PCI	ISA	PSU Connector
HPCI-14S12U	2	12	1	ATX/AT
HPCI-14S7U	3	7	4	ATX/AT


Power Supply Options

Model Number	Watt	Input Range	Output (Max.)						Current Type
			+5V	+3.3V	+12V	-12V	-5V	+5Vsb	
APS-925XA-ST	250W	100-240VAC	25A	25A	13A	0.8A	0.3A	2A	ATX12
APS-930XA-ST	300W	90-264VAC	40A	30A	15A	1A	0.5A	2A	ATX12
APS-940XA-ATX12	400W	90-240VAC	35A	25A	30A	1A	0.8A	2A	ATX12
APS-930RAXA (Mini Redundant)	300W	90-264VAC	25A	18A	16A	0.5A	0.5A	2A	ATX12

Note: Contact us for more options such as DC input power supplies.

Dimensions

Unit: mm

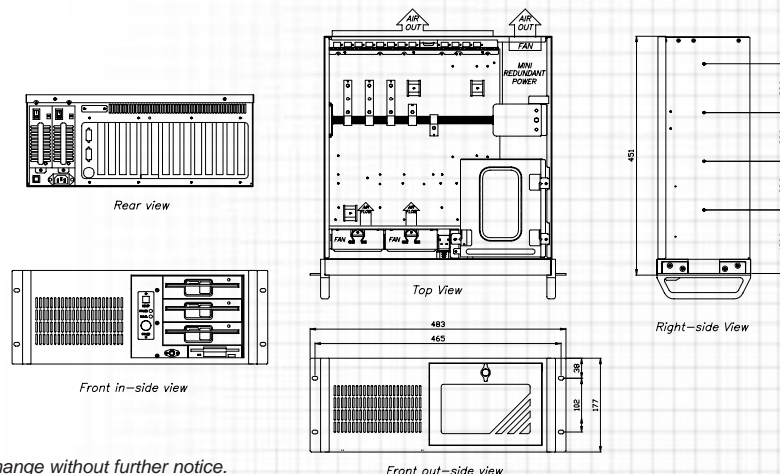

Specifications

Dimensions	19 x 7 x 17.8-inch (480 x 177 x 451mm) (W x H x D)
Drive Bays	Three 5.25" and one 3.5" front accessible drive bays
Construction	Heavy-Duty Steel
Color Options	Beige: standard Others: call for availability
Cooling Fans	Two 9cm ball bearing fans, 51 CFM/each
Front Panel	Front door with lock Two LEDs: Disk active and system power System reset switch AT power button, optional ATX power switch
Rear Panel Option	Supports 14-slot passive backplane Supports PS2 form factor AT, ATX power supply unit
Carton Size	23.6" x 13.6" x 25.2"-inch (600 x 345 x 640mm)
Weight	18kg/39.6lbs

- 1 Embedded Modules
- 2 CompactPCI SBCs
- 3 Peripheral Cards
- 4 CompactPCI Platforms
- 5 Single Board Computers
- 6 Embedded Boards
- 7
- 8 Add-on cards