

JetBox 9535

Embedded PoE VPN Router Computer: 1 WAN, 8 PoE



PoE

VPN

IPv6

- Intel IXP435 667MHz networking processor
- Complete Layer3 routing support: OSPF, RIP, DVMRP, IPv6
- 8-port PoE delivers full 15.4W per port, 123w per unit
- Full management features with QoS, VLAN, PoE scheduling
- Separated two DC 12~48V power inputs (48V for PoE)
- Versatile interfaces of USB, DIO, SD control, and optional modules for RFID, WLAN, and WiMax
- Embedded Linux UI—Modulized Webmin, capable of running customized control programs
- Cross-platform applications
- Fan-less and Ruggedized Industrial Design for anti-vibration, anti-shock, and -25~70°C operation temperature




Overview

The stylish JetBox 9535 series is an industrial layer-3 router with power-over-Ethernet technology and Linux computing. It is a gateway to connect different network groups (Ethernet, fieldbus, serial or IO control) in a complex networking architecture and manage peripherals at the front-end site

through its Linux programs. It is reliable (network redundancy, system recovery) and robust (passive cooling, protected against the dusts and spills, shock & vibration resistance) to adopt in severe industrial vertical markets, such as transportation, substation, or hazardous environment.

Dimensions (Unit = mm)

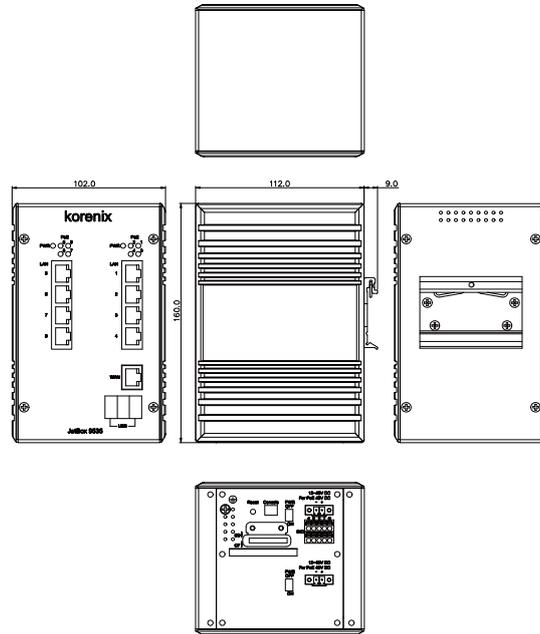

Hardware Specifications

System

Processor:

Intel Xscale IXP435 667MHz RISC-based
Fanless

System memory: 128MB DDR2 RAM

System flash: 32MB

Ethernet: 10/100 Based-Tx RJ-45 connector x9

Network cables for PoE:

10Base-T: 4-pair UTP/STP Cat.3,4,5,

EIA/TIA-568 100ohm (100m)

100Base-Tx: 4-pair UTP/STP Cat.5

EIA/TIA-568 100ohm (100m)

Storage:

SD card slot x1

CF card slot x1

USB: USB 2.0 x3 (Host)

Supporting devices: USB flash, wireless dongle

Digital IO: 8 DIO (default 8 DI), DI or DO is defined by customers

Console port: 3-pin header (RS232 interface)

LED per port (on the port):

Link/Activity (Green on/Green blinking)

Full Duplex/Collision (Yellow on/ Yellow blinking)

LED per PoE port (LAN1~LAN8):

Powered/none x8(Yellow on/off)

LED per unit:

Power on/off x1 (Green on/off)

Power on/off switch x1

Reset button x1

HW Watchdog timer:

Generates a time-out system reset, 1sec

Power Supply:

Two separated power inputs

DC input 48V (for PoE)

DC 12~48V

Power Consumption:

One input 1.6A at 48V (Maximum, including PoE)

OS support: Embedded Linux 2.6.20

Mechanical

Construction:

Rugged Aluminum Alloy Chassis, IP31 protection

Color: Silver

Mounting: DIN rail (wall mount optional)

Dimension: 160(H) x 112 (W) x 102 (D) mm

Net weight: 1.2kg

Environment

Operating Temp:

-13 ~ 158°F(-25 ~ 70°C), 5 to 95% RH

Storage Temp: -40 ~ 176°C(-40 ~ 80°C), 5 to 95% RH

Regulation: FCC class A, CE, UL*(Pending)

EN55022 class A

EN55024

EN61000-3-2, 3

EN61000-4-2, 3, 4, 5, 6, 8, 11

IEC 60950

Shock: IEC60068-2-27 (50g peak acceleration)

Vibration:

IEC60068-2-6 (5g/ 10~150Hz/operating)

MTBF: At least 200,000 hours @ 25°C

Warranty: 5 years

*to be confirmed

Industrial
PoE Switch

IP67/68
Ethernet Switch

Rackmount
Managed
Switch

Gigabit Switch

Redundant
Switch

Entry-Level
Switch

Networking
Computer

Communication
Computer

Ethernet
I/O Server

Serial Device
Server

Media
Converter

Multiport
Serial Card

SFP Module

Din Rail
Power Supply

Feature Specifications

WAN Interface

Ethernet: 10/100 Based-Tx RJ-45 connector x1, auto MDI/MDI-X

LAN Interface

Ethernet: 10/100 Based-Tx RJ-45 connector x8 (with PoE), auto MDI/MDI-X

Routing per VLAN: Support port-based VLAN and IEEE802.1Q VLAN

Quality of Service: Four priority queues per port, 802.1p COS and IP Layer TOS/DiffServ

Ethernet Performance

Transfer Rate: 14,880 pps for Ethernet port and 148,800 pps for fast Ethernet port

Transfer Packet Size: 64 bytes to 1522 bytes (with VLAN tag)

MAC address: 1K MAC address table

Memory Buffer: 512 Kbits

IP Routing Service

Static routing

Dynamic routing: RIP, RIP-II, OSPF, ISIS*, BGP*, DVMRP, PPP

PPPoE

IP Firewall/ Perimeter Security

IP address and port filtering

NAT/ DMZ

VPN: L2TP, PPTP, SLIP, VLAN, IPsec, OpenVPN, GRE*, NHRP*, DMVPN*

Management & Security

Security

HTTPS, SSH, SFTP

Basic Web UI Module (Webmin): PPP/PPPoE Dial up, Configure file management, DHCP Server, Initial System Boot up, Firewall, Network Configuration, Scheduled Jobs System Logs, System Time, User account manager Webmin configure

Extensible for other proprietary Web UI modules:

Routing, NAT, Switch, DIO, Serial, PoE

Extensible for other standard Web UI (webmin) modules

Linux shell access via TELNET connection or console port

SNMP v1, v2c, v3: MIB and traps

MIB-II, Bridge MIB, Ethernet-like MIB, VLAN MIB

Proprietary SNMP MIB sample code

NTP for time management

Power over Ethernet

PD classification: detection, class ID 0~3 follow IEEE802.3af standard

PIN assignment (RJ45 connector): V+ (Pin 4,5), V- (Pin 7,8), Tx (Pin 1,2), Rx (Pin 3,6)

PoE control: Support user configuration for PoE enable, disable, or based on schedule

PoE schedule control: Each PoE port can be active and powered scheduling with different rules. It supports weekly schedule on hourly basis.

Power limit control: The control mode supports IEEE802.3af standard. The maximum DC power delivery on each PoE is 15.4W@DC 48 V input.

Technology

Standard:

IEEE802.3 10Base-T Ethernet

IEEE802.3u 100Base-Tx Fast Ethernet

IEEE802.3af Power over Ethernet (PoE)

IEEE802.3x Flow Control and Back-pressure

IEEE802.1p Class of service

IEEE802.1Q VLAN

Processing: Store and Forward architecture

Packet filter: Broadcast packet filtering

*Optional

Linux Specifications

Embedded Linux

Bootloader: JetBox bootloader

Linux Kernel: 2.6.20

Shell: GNU ash

File system: jffs2, NFS, Ext2, Ext3, VFAT, FAT

Device drivers: SD card, CF card, USB, Watchdog timer, UART, Ethernet, DIO

Protocol: ARP, PPP, CHAP, IPv4, IPv6, PAP, ICMP, TCP, UDP, NFS, RIP, RIP-II, OSPF, ISIS, BGP, DVMRP, L2TP, PPTP, SLIP, VLAN, IPsec, OpenVPN

Software packages: busybox (telnetd, inetd, udhcp), e2fsprongs, i2c-tools, ltp-testsuite, microcom, mtd, pciutils,

setserial, usbmount, usbutils, bridge-utils, ethtool, iptables, net-snmp, ntp, openssh, openssl, openVPN, openSWAN, pppd, pptp-linux, proftpd, samba, smtpclient, bind, l2tp, mrouted, quagga, wireless-tools, jamvm, syslogd, udhcp, goahead web server

Korenix Linux auto-run function

Customized configuration

Process monitoring

SDK

Linux tool chain: Gcc (C/C++ PC cross compiler), uClibc

Linux sample code

Ordering Information

JetBox 9535 Intel IXP435 667MHz, 48V DC, 128MB SDRAM

Includes:

- JetBox 9535
- Console cable x1
- Attached two 2-pin power terminal block
- Attached 5-pin DIO terminal block x 2
- Attached blanket to cover SD card slot
- Attached name plate to cover CD card slot
- Quick installation guide
- Documentation and software CD-ROM

Optional Accessories

- Additional applications on CF card: CF card capacity is 2G
CF2G-L-J Webmin UI for Linux
- 802.11g wireless dongle

Industrial
PoE Switch

IP67/68
Ethernet Switch

Rackmount
Managed
Switch

Gigabit Switch

Redundant
Switch

Entry-Level
Switch

**Networking
Computer**

Communication
Computer

Ethernet
I/O Server

Serial Device
Server

Media
Converter

Multiport
Serial Card

SFP Module

Din Rail
Power Supply