

# PXES-2590

## 3U 9-Slot PXI Express Chassis with All Hybrid Peripheral Slots and Universal AC Power Supply



### Introduction

The ADLINK PXES-2590 is a 9-slot PXI Express chassis equipped with advanced features and functions. Compliant with PXI Express and cPCI Express specifications, the PXES-2590 offers one system slot, one system timing slot, and seven hybrid peripheral slots for versatile test and measurement applications requiring enhanced bandwidth. The hybrid-slot design accepts installation of CompactPCI, PXI, CompactPCI Express, and PXI Express modules into any peripheral slots in PXES-2590, maximizing flexibility. The PXES-2590 is built on a four-link PXI express chassis with 8 GB/s system bandwidth, and 1 GB/s slot bandwidth for all peripheral slots.

The PXES-2590 is implemented with a smart system monitoring controller, reporting full chassis status, including fan speed, system voltages, and internal temperature.

Equipped with an industrial grade AC power supply, the PXES-2590 still provides 400 W under 55°C, and delivers superior cooling capacity, from two 120 mm cooling fans on the rear of the chassis. Two BNC connectors for 10 MHz clock input/output on the rear panel increase chassis flexibility, enabling synchronization with supplementary devices. All in all, PXES-2590 is the best PXI Express platform choice for testing and measurement requirements.

### Features

- PXI™-5 PXI Express hardware specification Rev.1.0 compliant
- 9-slot PXI Express chassis with one system slot, one system timing slot, and seven hybrid peripheral slots
- Four-link PXI Express chassis
- Up to 8 GB/s system bandwidth
- Up to 1 GB/s peripheral bandwidth for all slots
- 0°C to 55°C extended operating temperature range
- Intelligent chassis management
  - Automatic fan speed control
  - Chassis status monitoring and reporting
  - Remote chassis power on/off control
- BNC connectors for 10 MHz clock input/output
- Maximum total usable power is 400 W under 55°C
- Power, temperature, and fan monitoring LEDs

PXES-2590 Front View




PXES-2590 Back View



10 MHz Ref clock input/output BNC connectors

FAN Speed Control Switch  
Inhibit Enable/Disable Switch & Power rails monitoring port




PXES-2590 Hybrid Peripheral Slots

### Highlights

#### All Hybrid Peripheral Slots Design

The ADLINK PXES-2590 features an all-hybrid peripheral slot design, with PXI Express, cPCI Express, PXI, and CompactPCI modules compatible with every slot.




• Backplane Link Configuration

**Innovative Cooling Mechanism**

The ADLINK PXES-2590 features an innovative heat dissipation solution. Two 185.9CFM cooling fans in the rear section of the chassis draw cool air through lower apertures, which is then exhausted through the back. This design generates uniform airflow for each PXI slot, delivering exceptional cooling.

When installed in a rack, the cooling design minimizes intake of hot air from the rear side, separating airflow for modules and power supplies, while isolating noise source (fan) from modules and maintaining a steady internal temperature.

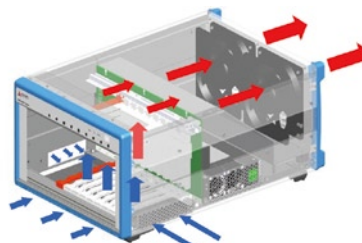

**Intelligent Chassis Management**

The PXES-2590 has a built-in system monitoring controller that monitors and manages full chassis status, including internal temperature, fan speed, and DC voltages.

**Specifications**

**Power Supply**

- AC Input
  - Input voltage range: 100 to 240 VAC
  - Input voltage frequency: 50 to 60 Hz
- DC Output
  - Maximum total usable power is 400 W

VDC	Maximum	Load Regulation	Maximum Ripple & Noise
+5 V	23.0 A	±3%	50 mV
+12 V	27.0 A	±3%	120 mV
+3.3 V	33.0 A	±3%	50 mV
-12 V	1.75 A	±3%	120 mV

**Bus Interface**

- Four-link capacity PXI Express chassis
- Up to 4 GB/s system bandwidth
- Up to 1 GB/s peripheral bandwidth for all slots

**IO/Switch on Rear Panel**

- BNC connectors for 10MHz clock input/output
- Fan speed selector switch
- Inhibit mode selector switch
- D-SUB9 for voltage monitoring and remote inhibit

**Cooling**

- Fans: 2 x 185.9 CFM fans with filters
- Per-slot cooling capacity: 30 W

**Physical**

- Number of PXI slots:
  - 1 system slot + 1 system timing hybrid slot
  - + 7 peripheral slots
- Dimensions:
  - 322 mm x 190 mm x 456 mm (W x H x D)
- Weight: 9 kg (19.8 lbs)

**Operating Environment**

- Ambient temperature: 0°C to 55°C
- Relative humidity: 10% to 90%, non-condensing

**Storage Environment**

- Ambient temperature: -20°C to 70°C
- Relative humidity: 10% to 90%, non-condensing

**Shock and Vibration**

- Functional shock: 30 G, half-sine, 11 ms pulse duration
- Random vibration:
  - Operating: 5 to 500 Hz, 0.5 Grms, 3 axes
  - Non-operating: 5 to 500 Hz, 2.46 Grms, 3 axes

**Emissions Compliance**

- EN 61326-1
- FCC Class A

**CE Compliance**

- Safety: EN 61010-1
- Immunity: EN 61326-1

**Recommended System Controller**

	PXES-2590
PXIe-3975	√

**Ordering Information**

**■ PXES-2590**

3U 9-slot PXI Express chassis with all-hybrid peripheral slots and universal AC power supply