

CT-3620 Series

Rugged Conduction Cooled 3U CompactPCI® Processor Blade with Quad-Core Intel® Atom™ Processor

Features

- Low-power quad-core Intel® Atom™ Processor E3845 SoC
- Up to 4GB DDR3L-1333 ECC soldered memory
- Onboard 32GB SSD support
- Smart Embedded Management Agent (SEMA) for system health monitoring



Specifications

• Processor & System

CPU

µFC-BGA quad-core Intel® Atom™ processor E3845 SoC, 1.9GHz, 2MB L3 cache, 10W TDP

Memory

Single channel DDR3L-1333 ECC soldered, up to 4GB

BIOS

AMI EFI BIOS, dual 64M Bit SPI flash memory

CompactPCI Bus

PCI 32-bit, 33/66MHz, 3.3V or 5V universal V(I/O)

Operation in system slot as master or in peripheral slot as stand-alone blade without connectivity to CompactPCI bus (Satellite mode)

PICMG Standards

PICMG 2.0 CompactPCI R3.0

PICMG 2.1 Hot Swap R2.0

• Connectivity

Ethernet

Two Intel® I210 GbE controllers for two rear ports

Graphics

Integrated in processor with DirectX 11.1 and OCL1.2

One VGA routed to rear

Serial Port

Two serial ports routed to rear

USB

One USB routed to rear

• Operating System

OS

Windows 7/8 32/64-bit

Red Hat Enterprise Linux 6.5

Fedora 20

Wind River VxWorks 5.5.1, 6.4, 6.9

RTX Real-Time (Please contact ADLINK for other OS support)

• Miscellaneous

LED

Power, WDT, Storage Drive, Thermal, General Purpose

Battery

Gold Capacitor onboard for RTC CMOS RAM

Watchdog Timer

System Reset and NMI, with programmable interval, 1-65535 seconds or minutes

Hardware Monitor

Monitors CPU temperature, system temperature, Vcore and DC voltage

Specifications

• Mechanical & Environmental

Form Factor

3U 4HP CompactPCI
100mm x 160mm (L x W)

Operating Temp.

-40°C to +85°C

Storage Temp.

-50°C to +100°C

Shock

40g (half-sine), 11ms duration, non-operating

Vibration

5g (sine), 22 to 2000Hz, operating

Relative Humidity

95% non-condensing

Power Consumption

2.75A @ 5V, 13.75W

• Safety & EMI

Certifications: CE/FCC

Ordering Information

Processor Blades

• CT-3620/E3845/M4/S32

1-slot (4HP) rugged conduction cooled 3U CompactPCI blade with Intel® Atom™ processor E3845, 4GB DDR3L-1333 soldered memory, and onboard 32GB SSD


Rear Transition Modules

• cPCI-R3610

8HP rear I/O module with 2x GbE, 1x USB 2.0, VGA, 2x COM, 2x SATA 3Gb/s (only 1x SATA from CT-3620), 50mm depth

• cPCI-R3610T

8HP rear I/O module with 2x GbE, 1x USB 2.0, VGA, 2x COM, 2x SATA 3Gb/s (only 1x SATA from CT-3620), 80mm depth

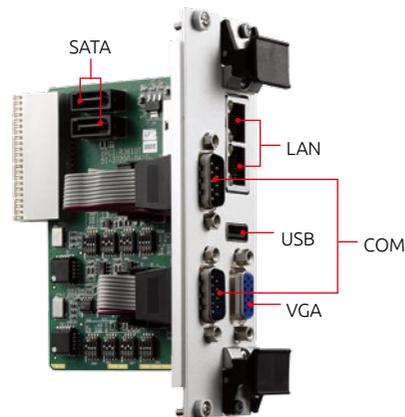

cPCI-R3610T