

Rugged Switch with High Resilience

DS409

Industrial 9G L2 Managed Ethernet Switch

DS409 is designed for industrial environments requiring high quality data transmission and time synchronization, such as industrial automation, road traffic control, etc. The switch provides 6-port Gigabit Ethernet and 3 uplink Gigabit combo ports. Full Gigabit capability and rugged industrial design ensures system high performance and reliability in harsh environments. For convenient traffic control and zero packet loss data transmission, DS409 offers contemporary management and security functions as well as ITU-T G.8032 v1/v2 ERPS redundancy.



Features & Benefits

Full Gigabit Switching and Ultra High Throughput

- **9-port Full Gigabit** Ethernet, including 6 RJ45 ports and 3 SFP/RJ45 combo ports
- High flexibility of cable types and distances for system integrators
- DDM function for high quality fiber connectivity monitoring
- **8K** MAC address table
- Store-and-forward with non-blocking switch fabric

Management Features

- Various configuration paths, including WebGUI, CLI, SNMP and RMON
- IEEE **1588v1 PTP** time management
- LLDP topology control
- USB for easy field configuration and firmware update
- Software utility interface for LAN devices management
- NMS for individual component monitoring

ITU-T G.8032 v1/v2 ERPS Ring Redundancy

- An ITU standard Ring redundancy Protocol
- Provides sub-50ms protection and recovery switching for Ethernet traffic
- Interoperates with 3rd party industrial switch and still remains fast recovery time
- Interoperates with commercial switch instead of STP/RSTP
- Efficient network interconnection and topology with ERPS Chain, multiple chains

Enhanced Cyber Security for Critical Applications

- **802.1X/RADIUS** port-based access control
- Port MAC secure learning
- Private VLAN/IP Security/Port Security
- HTTPs/SSH/ Management IP secure access

Rugged Design for Wayside Network Switching with Wide Power Input Range

- **NEMA-TS2** compliance for wayside traffic control assemblies
- **10.5~60V** wide power range design with redundant power input
- Excellent heat dissipation design for operating in **-40~75°C** environments
- High level **EMC protection** exceeding traffic control and heavy industrial standards' requirements
- IEC 61000-6-2/4 Heavy Industrial Environment
- EN50121-4 railway trackside EMC



Interfaces

Integrated Power Connector

- 1 x 8-pin terminal block
- 4 pin for redundant power input
- 2 pin DI
- 2 pin DO
- Easy installation

System LED

- 2 x Power
- 1 x System Status
- 1 x DO
- 1 x DI
- 1 x Ring status
- 3 x SFP Port
- 3 x SFP 1000M

Easy System Management

- USB for Configuration/Firmware update
- RS232 console

8-port 10/100MBase-TX

DIN Clip




3 Gigabit Uplink

- 3-port 100/1000M RJ45/SFP combo




Dimensions


(mm)

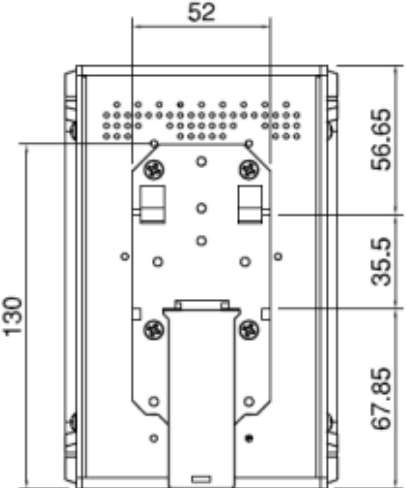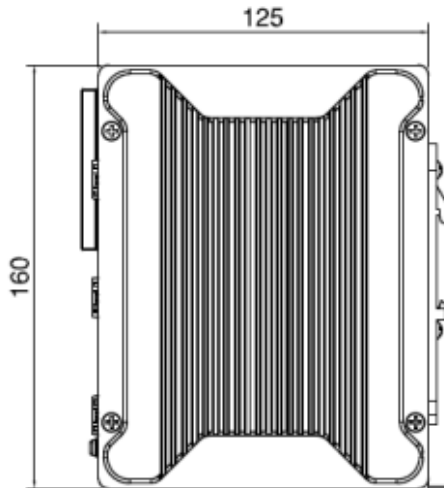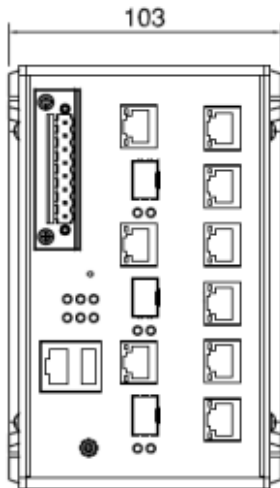

Top

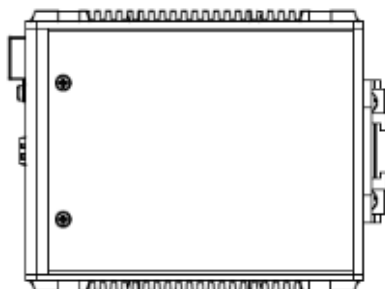

Bottom

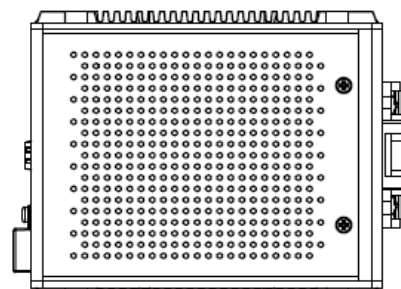

Technology

Standard	IEEE 802.3 10Base-T Ethernet
	IEEE 802.3u 100Base-TX Fast Ethernet
	IEEE 802.3u 100Base-FX Fast Ethernet Fiber
	IEEE 802.3ab 1000Base-T Gigabit Ethernet copper
	IEEE 802.3z Gigabit Ethernet Fiber
	IEEE 802.3x Flow Control and back-pressure
	IEEE 802.1AB Link Layer Discovery Protocol (LLDP)
	IEEE 802.1p Class of Service (CoS)
	IEEE 802.1Q VLAN and GVRP
	ITU-T G.8032 Ethernet ring protection switching(ERPS)
	IEEE 802.1D-2004 Rapid Spanning Tree Protocol (RSTP)
	IEEE 802.1Q-2005 Multiple Spanning Tree Protocol (MSTP)
	IEEE 802.3ad Link Aggregation Control Protocol (LACP)
	IEEE 802.1x Port based Network Access Protocol
	IEEE 1588 Precision Time Protocol v1

Performance

Switch Technology	Store and Forward Technology with Non-Blocking Switch Fabric
Number of MAC Address	8K
Packet Buffer Memory	1M bits
Transfer performance	10Base-T: 14,880pps, 100Base-TX/FX: 148,800pps, 1000Base-TX/FX: 1,488,100pps
VLAN	256 VLANs
VLAN ID	1~4094
Traffic Prioritize	4 Priority Queues per Port
Watchdog	Hardware-based 10 seconds timer

Interface

Ethernet Port	6 x 10/100/1000Base-T RJ45, Auto Negotiation 3 x 100/1000M RJ45/SFP Combo, Auto Negotiation/DDM
System LED	1 x SYS: Ready: Green On, Firmware Updating: Green Blinking 2 x Power: Green On 1 x Ring: Off: Ring disabled, Green On: Ring normal (Not RPL Owner), Green Blinking: Ring normal (RPL Owner), Amber On: Ring abnormal, Amber Blinking: Ring port fail 1 x DI : Green On 1 x DO: Red On
Ethernet Port LED	Link (Green On), Activity (Green Blinking), Speed 1000M (Amber On), Speed 100M (Green On)
SFP LED	Port: Link (Green On), Activity (Green Blinking); 1000M: Speed 1000M (Amber On), Speed 100M (Green On)
Reset	System Reboot(2-6 Seconds)/Default Settings Reset(over 7 Seconds)
Console	1 x RS232 for System Configuration. Baud Rate: 115200.n.8.1
USB	1 x USB for Configuration/Firmware Update

Power Input, Digital Input, Digital Output	8-Pin Removable Terminal Block Connector 4 Pins for Redundant Power 4 Pins for DI, DO (Relay Alarm) Digital Output: Dry Relay Output with 0.5A /24V DC Digital Input with Photo-Coupler Isolation Digital High: DC 11V~30V Digital Low: DC 0V~10V
Power Requirement	
Operating Voltage	12/24/48VDC(10~60VDC)
Reverse Polarity Protect	Yes
Input Current	0.65A@24V
Power Consumption	Max 15.6W@24VDC full traffic, suggest to reserve 15% tolerance
Software	
Management Interface	CGI, WebGUI, Command Line Interface (CLI), Telnet, SNMP
Time Management	NTP, IEEE 1588 Precision Time Protocol v1
Network Management	IPv4/IPv6, SNMP v1/v2c/v3/Trap, MIBs, RMON, LLDP, DHCP server/client/Option 82, TFTP, System Log, SMTP
Traffic Management	Flow Control, Port Trunk/802.3ad LACP, VLAN, Private VLAN, GVRP, GMRP, QinQ, Class of Service, Traffic Prioritize, IGMP Snooping v1/v2/v3, Rate Control, Port Mirror
Security	IEEE 802.1X/RADIUS, Port MAC Secure Learning, Management IP, Management VLAN, SSH, SSL
Redundancy	Rapid Spanning Tree Protocol (RSTP)/Multiple Spanning Tree Protocol (MSTP) ITU-T G.8032 v1/v2 Ethernet Ring Protection Switching (ERPS)
Mechanical	
Installation	DIN Rail
Enclosure Material	Steel Metal with Aluminum
Dimension	103 x 160 x 125 (W x H x D) / without DIN Rail Clip,
Ingress Protection	IP31
Weight	1.5KG (device) / 2.0KG (full package)
Package	290(W)x220(L)x150(H)mm (package) 12pcs / carton 410(W)x 550(L)x490(H)mm (1.5KG)
Environmental	
Operating Temperature & Humidity	-40°C~75°C , 0%~95% Non- Condensing
Storage Temperature	-40°C~85°C
Hi-Pot	AC1.5kV
MTBF	>200,000 hours
Warranty	5 years
Standard	
Safety	EN60950-1 Compliance
EMC	EN61000-6-2/EN61000-6-4
EMI	CISPR 22, FCC part 15B Class A
CE Declaration	EN61000-4-2 ESD: 8KV(Air), 6KV(Contact) EN61000-4-3 RS: 20V/m(80M~1GHz), 10V/m(1.4G~2.1GHz), 5V/m(2.1G~2.5GHz) EN61000-4-4 EFT: 2KV(Power, Signal Port, GND) EN61000-4-5 Surge: Power: 2KV/1KV(Line to Ground/Line to Line), Signal Port: 2KV(Line to Ground) EN61000-4-6 CS: 10Vrms(Power, Signal Port) EN61000-4-8 Magnetic Field: 30A/m continues/300A for 1~3s



Ordering Information

Model Name	Description
DS409	Industrial 9G L2 Managed Ethernet Switch
	Package List
	1 x Product Unit (Without SFP Transceiver)
	1 x 8-pin Removable Terminal Connector
	1 x Attached Din Clip
	1 x Quick Installation Guide



Optional Accessory

Item	
MK-D1-2	Wall-mounting kit with 2 plates and 8 screws
CBL-RJ45F9-1.5M	Serial RS232 console cable RJ45 to DB9 Female 1.5Meter
PSD40-24	40W/24VDC DIN-rail power supply
SFPGEM05	SFP, 1000Mbps, LC, multi, 550M, 0~70°C
SFPGEM05T	SFP, 1000Mbps, LC, multi, 550M, -40~85°C
SFPGEM05D	SFP, 1000Mbps, LC, multi, DDM, 550M, 0~70°C
SFPGEM05DT	SFP, 1000Mbps, LC, multi, DDM, 550M, -40~85°C
SFPGEM2	SFP, 1000Mbps, LC, multi, 2KM, 0~70°C
SFPGEM2T	SFP, 1000Mbps, LC, multi, 2KM, -40~85°C
SFPGEM2D	SFP, 1000Mbps, LC, multi, DDM, 2KM, 0~70°C
SFPGEM2DT	SFP, 1000Mbps, LC, multi, DDM, 2KM, -40~85°C
SFPGES10	SFP, 1000Mbps, LC, single, 10KM, 0~70°C
SFPGES10T	SFP, 1000Mbps, LC, single, 10KM, -40~85°C
SFPGES10D	SFP, 1000Mbps, LC, single, DDM, 10KM, 0~70°C
SFPGES30	SFP, 1000Mbps, LC, single, 30KM, 0~70°C
SFPGES30T	SFP, 1000Mbps, LC, single, 30KM, -40~85°C
SFPGES30D	SFP, 1000Mbps, LC, single, DDM, 30KM, 0~70°C
SFPXGM03D	SFP+, 10Gbps, LC, multi, DDM, 300M, 0~70°C
SFPXGS10D	SFP+, 10Gbps, LC, single, DDM, 10KM, 0~70°C
SFPGES10-A	SFP, 1000Mbps, LC, single, 10KM, BiDi TX-1310nm RX-1550nm, 0~70°C
SFPGES10-B	SFP, 1000Mbps, LC, single, 10KM, BiDi TX-1550nm RX-1310nm, 0~70°C
SFPGES10T-A	SFP, 1000Mbps, LC, single, 10KM, BiDi TX-1310nm RX-1550nm, -40~85°C
SFPGES10T-B	SFP, 1000Mbps, LC, single, 10KM, BiDi TX-1550nm RX-1310nm, -40~85°C
SFPGES10D-A	SFP, 1000Mbps, LC, single, DDM, 10KM, BiDi TX-1310nm RX-1550nm, 0~70°C
SFPGES10D-B	SFP, 1000Mbps, LC, single, DDM, 10KM, BiDi TX-1550nm RX-1310nm, 0~70°C