

RK-615FB

4U Rackmount Industrial Chassis with 15-slot Backplane ⚡



Features

- Three 5.25 and one 3.5 inch shock-resistant drive bay
- Easy to remove and install top cover
- Flexible hold down bar for cards
- Supports AT or ATX power supply units
- Removable air filter
- Two front accessible USB connectors

Power Supply Options

Model Number	Watt	Input Range	Output (Max.)						Current Type
			+5 V	+3.3 V	+12 V	-12 V	-5 V	+5 Vsb	
APS-935XA-EPS12	350 W	90-264AC full Rang	40 A	30 A	18 A	1 A	0.5 A	2 A	EPS12
APS-940XA-ATX12	400 W	90-264AC full Rang	35 A	25 A	30 A	1 A	0.8 A	2 A	ATX12

Note: Contact us for more options such as DC input power supplies.

Backplane Options

Model Name	PICMG® CPU	PCI™	ISA	PCI-X™	PSU Connector
HPCI-15S	2	4	9		ATX/AT
HPCI-15S10	2	10	3		ATX/AT
HPCI-14S/ATX	2	4	8		AT/ATX
HPCI-14S12U	2	12	1		AT/ATX
HPCI-14S7U	3	7	5		AT/ATX
HPCI-13S4LU	3	4	7		AT/ATX
HPX-13S4	1	8*		4*	ATX

*All PCI-X™ and PCI™ slots are 64-bit


Specifications

Dimensions	19 x 7 x 20.1 inch (480 x 177 x 510 mm) (W x H x D)
Drive Bays	Three 5.25" front accessible drive bays (One conversation rack for 3.5" HDD & one conversation rack for front accessible 3.5" FDD)
Construction	Heavy-Duty Steel
Color Options	Beige: standard Others: call for availability
Cooling Fans	One 12 cm ball bearing fan 108 CFM. Optional second fan.
Front Panel	Front door with lock Two front accessible USB connectors LEDs: HDD active and system power System reset switch Power switch button
Rear Panel Option	Supports 14/15-slot passive backplane Supports PS2 form factor AT or ATX power supply unit
Carton Size	27.2 x 23.6 x 13.6 inch (69 x 60 x 34.5 mm)
Weight	19 kg/41.8 lbs

Ordering Information

Model Name	Color	Backplane	Power Supply
NS-615FB-15S-350	Beige	HPCI-15S	APS-935XA-EPS12
NS-615FB-15S10-400	Beige	HPCI-15S10	APS-940XA-ATX12

Dimensions

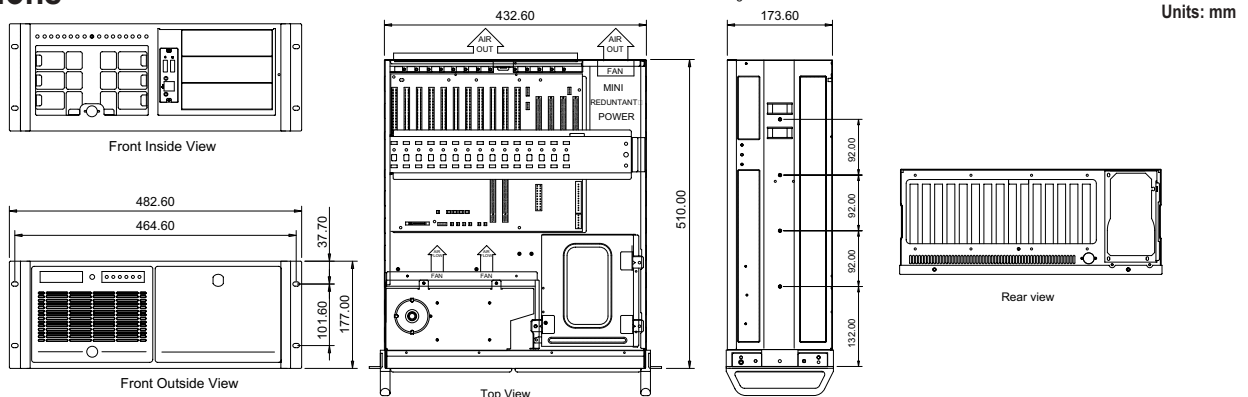

- AdvancedTCA Products
- 6U cPCI SBC
- 6U cPCI Platforms
- 3U cPCI SBC
- 3U cPCI Platforms
- SBC & IMB
- Industrial Chassis
- Computer On Modules
- Network Security Appliances
- Panel PC
- IPC Accessories