


DIN-24R-01/TB-24R-01


Termination Board with 24 Relay Outputs

Features

- 24-CH single-pole, double-throw (SPDT form C) relay outputs
- 50-pin Opto-22 compatible connector
- Maximum switching voltage 220 V_{DC}/250 V_{AC}
- Maximum switching current up to 2 A_{DC/AC}
- LED indicator for relay status
- Onboard relay driver circuitry
- Screw terminals for easy field wiring
- DIN socket available on DIN-24R-01
- 50-pin SCSI-type connector available on DIN-24R-01 to interface with ND-6058

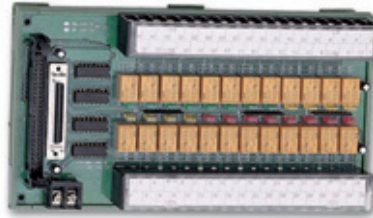

DIN-24R-01

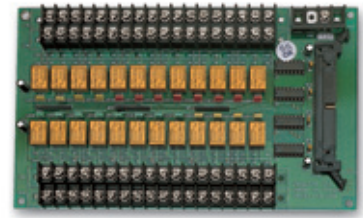

TB-24R-01

Introduction

The DIN-24R-01 and TB-24R-01 relay output boards are designed for industrial control applications. It contains 24 electro-mechanical SPDT relays that can be driven by the 24-bit digital output ports of the PCI-7224, PCI-7248, PCI-7296, ACL-7112, ACL-7124, PET-48DIO, and ND-6058.

Each relay's switching capacity is 60 W, 125 V_{AC}. The normally closed, and common contacts for each relay are made available for maximum flexibility.

Specification

- Relay Output
 - Number of channels: 24
 - Relay type: SPDT (Form C)
 - Contact rating
 - ♦ AC: 125 V @ 0.6 A
 - ♦ DC: 30 V @ 2 A
 - Breakdown voltage: 1500 V_{RMS}
 - Contact resistance: 50 mΩ
 - Relay ON/OFF time
 - ♦ Operate time: 3 ms
 - ♦ Release time: 3 ms

- LED Indicators for relay status: per channel
- Expected life: 5 x 10⁵ operations @ 2 A, 30 V_{DC}
- External coil excitation voltage
 - ♦ 12 V nominal, 19.2 V maximum (TB-24R/12-01 & DIN-24R/12-01)
 - ♦ 24 V nominal, 38.5 V maximum (TB-24R/24-01 & DIN-24R/24-01)

- I/O Connector
 - 50-pin ribbon male
 - 50-pin SCSI-II female
- Operating temperature: 0 to 60 °C
- Storage temperature: -20 to 80 °C
- Relative humidity: 5 to 95%, non-condensing
- Power consumption

	+12 V	+24 V
TB-24R/12-01	288 mA maximum	--
TB-24R/24-01	--	44 mA maximum
DIN-24R/12-01		
DIN-24R/24-01		

- Dimensions
 - TB-24R-01: 220 mm x 132 mm x 15 mm (WxLxH)
 - DIN-24R-01: 203 mm x 120 mm x 55 mm (WxLxH)

Ordering Information

- **TB-24R/12-01⁽¹⁾**
Termination Board with 24-CH Relay Outputs @ 12 V Coil Voltage
- **TB-24R/24-01⁽¹⁾**
Termination Board with 24-CH Relay Outputs @ 24 V Coil Voltage
- **DIN-24R/12-01⁽¹⁾**
Termination Board with 24-CH Relay Outputs @ 12 V Coil Voltage and DIN-Rail Mounting
- **DIN-24R/24-01⁽¹⁾**
Termination Board with 24-CH Relay Outputs @ 24 V Coil Voltage and DIN-Rail Mounting
- **Accessory**
 - **Mating Cable⁽²⁾**
ACL-10150-1.5: 50-Pin Flat Cable, 1.5 M

Note:


- (1) Cables are not included
(2) For various length options, please contact local agents.

DIN-24P-01/TB-24P-01


Termination Board with 24 Opto-Isolated Digital Inputs

Features

- 24-CH opto-isolated digital inputs
- 50-pin Opto-22 compatible connector
- Non-polarity digital input range
- Isolated input voltage up to 24 V
- 5000 V_{RMS} optical isolation
- Jumper configurable for voltage input or dry-contact input mode
- LED indicator for input status
- Screw terminals for easy field wiring
- DIN socket is available on DIN-24P-01
- 50-pin SCSI-type connector available on DIN-24P-01 to interface with ND-6058

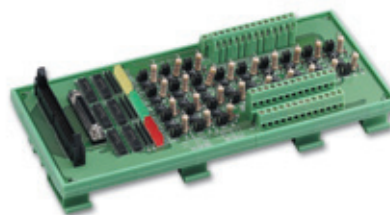

DIN-24P-01

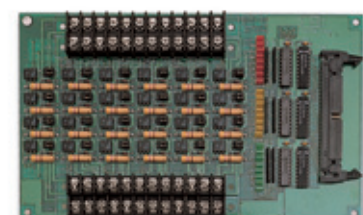

TB-24P-01

Introduction

The DIN-24P-01 and TB-24P-01 digital input termination boards feature high-voltage opto-isolation on all input channels. They provide 24 channels that are accessed through a single 50-pin connector that is standard on the NuDAQ digital I/O boards, including ACL-7122, ACL-7124, PET-48DIO, PCI-7224, PCI-7248, PCI-7296 and ND-6058. Each channel's input mode is configurable via jumper settings.

Specification

- Input modes
 - Voltage input
 - Dry contact input
- Isolated digital input
 - Number of channels: 24, maximum
 - Maximum input range: 24 V, non-polarity

- Digital logic levels
 - ♦ 0-24 V, non-polarity
 - ♦ Input high voltage: 5-24 V
 - ♦ Input low voltage: 0-1.5 V
 - ♦ Input resistance: 1.2 kΩ @ 0.5 W
 - ♦ Isolation voltage: 5000 V_{RMS}

- Dry contact input
 - Number of channels: 24
 - Internal pull-up voltage supply: +5 V_{DC}
- LED Indicators for input status: one per channel
- I/O Connector
 - 50-pin ribbon male
 - 50-pin SCSI-II female
- Operating temperature: 0 to 60 °C
- Storage temperature: -20 to 80 °C
- Relative humidity: 5 to 95%, non-condensing
- Power requirement:

+5 V
40 mA maximum

- Dimensions
 - TB-24P-01: 220 mm x 132 mm x 23 mm (WxLxH)
 - DIN-24P-01: 259 mm x 121 mm x 55 mm (WxLxH)

Ordering Information

- **TB-24P/24-01⁽¹⁾**
Termination Board with 24-CH Isolated Digital Inputs
- **DIN-24P/24-01⁽¹⁾**
Termination Board with 24-CH Isolated Digital Inputs and DIN-Rail Mounting
- **Accessory**
 - **Mating Cable⁽²⁾**
ACL-10150-1.5: 50-Pin Flat Cable, 1.5 M

Note:

- (1) Cables are not included
(2) For various length options, please contact local agents.

1	Software Solutions
2	PXI/CompactPCI Platforms
3	Modular Instrument
4	PXI/CompactPCI Modules
5	Bus Interface
6	GPIO Interface
7	PCI/PCI Express [®] DAQ Cards
8	PCI/PCI Express [®] DIO Cards
9	PC/104-Plus Modules
10	ISA DAS/DIO Cards
11	System Product
12	Wiring Termination Boards
13	Motion, HSL, Vision, COM & GEME
14	Remote I/O Modules
15	Industrial Computers