

RK-410FS

4U Rackmount Industrial Chassis with 14-slot Backplane ❖



Features

- EIA RS-310C 19" rackmount standard
- 17.8 inch (451 mm) short depth
- Three 5.25 and one 3.5 inch shock-resistant drive bays
- Two front accessible USB connectors
- Flexible hold down bar for cards
- Supports various backplanes and power supply units

Backplane Options


Model Name	PICMG® CPU	PCI™	ISA	PSU Connector
HPCI-14S12U	2	12	1	ATX/AT
HPCI-14S7U	3	7	5	ATX/AT
HPCI-14S/ATX	2	4	8	ATX/AT
HPCI-13S4LU	3	4	7	ATX/AT

Power Supply Options

Model Number	Watt	Input Range	Output (Max.)						Current Type
			+5 V	+3.3 V	+12 V	-12 V	-5 V	+5 VsB	
APS-935XA-EPS12	350 W	90-264AC full Range	40 A	30 A	18 A	1 A	0.5 A	2 A	EPS12
APS-940XA-ATX12	400 W	90-264AC full Range	35 A	25 A	30 A	1 A	0.8 A	2 A	ATX12

Note: Contact us for more options such as DC input power supplies.

Dimensions

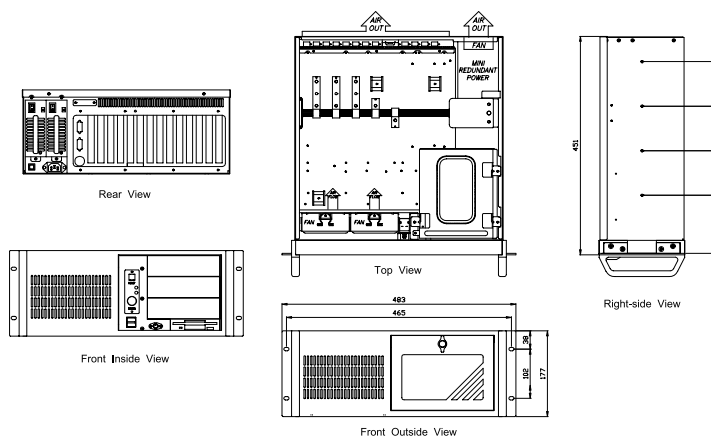

Specifications

Dimensions	19 x 7 x 17.8 inch (480 x 177 x 451 mm) (W x H x D)
Drive Bays	Three 5.25" and one 3.5" front accessible drive bay
Construction	Heavy-Duty Steel
Color Options	Beige: standard Others: call for availability
Cooling Fans	Two 9cm ball bearing fans, 51 CFM each
Front Panel	Front door with lock Two front accessible USB connectors Two LEDs: Disk active and system power System reset switch
Rear Panel Option	Supports 14-slot passive backplane Supports PS2 form factor AT, ATX power supply unit
Carton Size	23.6 x 13.6 x 25.2 inch (600 x 345 x 640 mm)
Weight	18 kg/39.6 lbs

Ordering Information

Model Name	Color	Backplane	Power Supply
NS-410FS-14S7U-350	Beige	HPCI-14S7U	APS-935XA-EPS12
NS-410FS-14S12U-400	Beige	HPCI-14S12U	APS-940XA-ATX12